


CX CONVENTIONAL

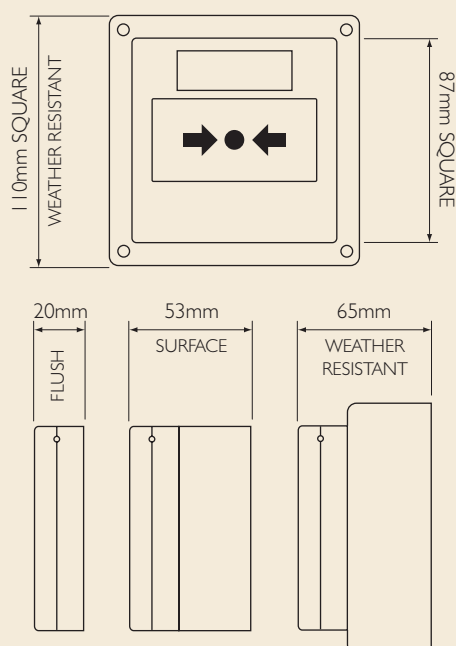

Specification

Configuration	Series Resistor 470R standard, other values or components as required
Rating	24V systems
Connections	4-way terminal block (In & Out for each connection)
Operating Method	Glass element with printed plastic safety film or resettable plastic element with integral alarm indicator
Test / Reset Facility	Unique key
Construction	ABS
IP Rating	Standard - IP42 Weather resistant - IP67
Temperature	- 25°C to + 55°C
Weight	0.19Kg (WR 0.29Kg)

For use with the majority of modern conventional systems. The CX has a resistor in series with the switch typically 470R, but other values or components may be specified to suit particular system characteristics. The CCX version has a claw fixing for installation in certain types of European wiring boxes.

- DESIGN APPROVED TO EN54-11
- SECURE AND CONVENIENT CLIP FIXING OF FRONT COVER
- CHOICE OF GLASS OR RESETTABLE PLASTIC ELEMENTS
- SUPERIOR ALARM IDENTIFICATION WITH ALARM FLAG ON RESETTABLE ELEMENT
- PRACTICALITY OF ONE KEY FOR TEST, RESET AND COVER REMOVAL